



DVP
DELTA Programmable Logic Controller



DELTA ELECTRONICS, INC.
www.delta.com.tw/industrialautomation

ASIA

Delta Electronics, Inc.

Taoyuan1
31-1, Xingbang Road, Guishan Industrial Zone,
Taoyuan County 33370, Taiwan, R.O.C.
TEL: 886-3-362-6301 / FAX: 886-3-362-7267

Delta Electronics (Jiang Su) Ltd.

Wujiang Plant3
1688 Jiangxing East Road,
Wujiang Economy Development Zone,
Wujiang City, Jiang Su Province,
People's Republic of China (Post code: 215200)
TEL: 86-512-6340-3008 / FAX: 86-769-6340-7290

Delta Electronics (Japan), Inc.

Tokyo Office
Delta Shibadaimon Building, 2-1-14 Shibadaimon,
Minato-Ku, Tokyo, 105-0012, Japan
TEL: 81-3-5733-1111 / FAX: 81-3-5733-1211

Delta Electronics (Korea), Inc.

234-9, Duck Soo BD 7F, Nonhyun-dong, Kangnam-ku,
Seoul, Korea (Post code : 135-010)
TEL: 82-2-515-5305 / FAX: 82-2-515-5302

Delta Electronics (Singapore) Pte. Ltd.

8 Kaki Bukit Road 2, #04-18 Ruby Warehouse Complex,
Singapore 417841
TEL: 65-6747-5155 / FAX: 65-6744-9228

AMERICA

Delta Products Corporation (USA)

Raleigh Office
P.O. Box 12173, 5101 Davis Drive,
Research Triangle Park, NC 27709, U.S.A.
TEL: 1-919-767-3813 / FAX: 1-919-767-3969

EUROPE

Deltronics (The Netherlands) B.V.


Eindhoven Office
De Witbogt 15, 5652 AG Eindhoven, The Netherlands
TEL: 31-40-2592850 / FAX: 31-40-2592851

*We reserve the right to change the information in this catalogue without prior notice



www.delta.com.tw/industrialautomation

Delta DVP series PLC is built-in with RS-232 and RS-485 communication port and supports Ethernet, DeviceNet, CANopen networks, working flexibly with the peripheral equipment and devices.

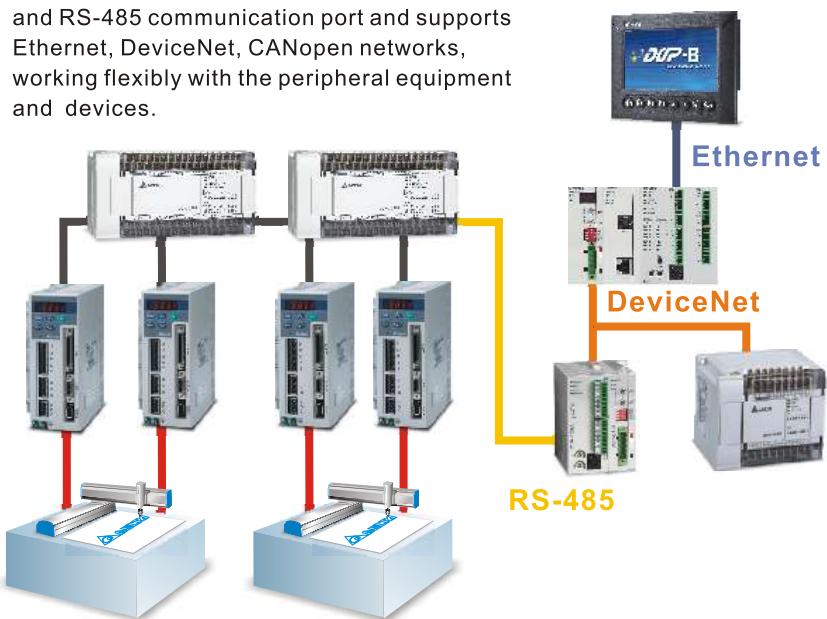

Execution Efficiency	SA	SX	SC	PM	EH2	SV
	Stable operation			500kHz high-speed output Interpolation Stable operation	200kHz high-speed output Interpolation Ethernet DeviceNet CANopen	200kHz high-speed output Interpolation Ethernet DeviceNet CANopen
ES	SS	EX				
	Stable operation	Analog output	Stable operation Interpolation			
Sequential Control	Analog Signal	High-Speed Positioning	Network Extension			

Contents

	Page
DVP-E Series MPU	3
DVP-S Series MPU	5
DVP-PM Series MPU	7
DVP-SV Series MPU	9
Extension	11
Electrical Specifications & Dimension	15
Network Structure	17
Ordering Information	19

DVP-EH2

Functional Standard Type MPU



EH2 series includes 7 types of MPU:

- With 3 types of I/O
- 40EH2 series with 4-axis control
- L type with left-side extension function

DVP-SV

Functional Space-Saving MPU



SV series satisfies all kinds of applications. It supports simple I/O control and high-grade 4-axis motion control, as well as all kinds of industrial network modules. Left side is extendable by special extension modules and right side by general extension module, totaling 16 extension modules extendable to DVP-SV.

DVP-PM

Motion Control MPU



DVP-PM is able to conduct 2-axis synchronous control and is designed for professional motion control. It is compatible with G-Code/M-Code and is the multi-axis extendable control system for the new generation.



Delta DVP series programmable logic controllers offer high-speed, stable and highly reliable applications in all kinds of industrial automation machines. In addition to fast logic operation, bountiful instructions, multiple function extension cards, the cost-effective DVP series also supports various communication protocols, connecting the industrial automation system as a whole into a complete Delta solution for the users.

DVP-E Series MPU



DVP-EX

- Built-in 4-channel analog input and 2-channel analog output
- Integral communication functions
- Lowest-cost MPU with analog functions

Specification & Performance

MPU points: 20(8DI/6DO, 4AI/2AO)
Max. I/O points: 238
Program capacity: 4k steps
Communication port: Built-in RS-232 and RS-485, compatible with Modbus ASCII/RTU communication protocol

High-Speed Pulse Output

Supports 2-point (Y0, Y1) independent high-speed pulse output, with frequency of up to 10kHz.

Built-in High-Speed Counters

1 phase 1		1 phase 2		2 phase 2	
Points	Bandwidth	Points	Bandwidth	Points	Bandwidth
2/2	20kHz/10kHz	1	20kHz	1	4kHz

*Bandwidth refers to the max. counting bandwidth of a single counter.

Built-in Analog Input/Output

Analog Input		Analog Output	
Points	4	Points	2
Resolution	10 bits	Resolution	8 bits
Specification	-20~20mA or -10~10V	Specification	0~20mA or 0~10V

DVP-ES

- High reliability
- Maximum 256 I/O points extendable
- Most economical solution to small PLC sequential control and communication monitoring

Specification & Performance

MPU points: 14/24/30/32/40/60
Max. I/O points: 256
Program capacity: 4k steps
Communication port: Built-in RS-232 and RS-485, compatible with Modbus ASCII/RTU communication protocol

High-Speed Pulse Output

Supports 2-point (Y0, Y1) independent high-speed pulse output, with frequency of up to 10kHz.

Built-in High-Speed Counters

1 phase 1		1 phase 2		2 phase 2	
Points	Bandwidth	Points	Bandwidth	Points	Bandwidth
2/2	20kHz/10kHz	1	20kHz	1	4kHz

*Bandwidth refers to the max. counting range of a single counter.

DVP-EH2

- Outstanding operation performance
- Built-in large space for program and data storage
- Supports more than 203 application instructions
- 2-axis linear/arc interpolation motion control
- Run with various high-speed function extension modules/function cards for all kinds of real-time applications

Specification & Performance

MPU points: 16/20/32/40/48/64/80
Max. I/O points: 512
Program capacity: 16k steps
Instruction execution speed: 0.24us (for basic instruction)
Communication port: Built-in RS-232 and RS-485, compatible with Modbus ASCII/RTU communication protocol.
Data register: 10,000 words
File register: 10,000 words

High-Speed Pulse Output

The pulse outputs 20-point and 32-point models support 2-point 200kHz pulse outputs (Y0, Y2).
The 40-point models support 2-group A, B phase 200kHz pulse outputs (Y0, Y1), (Y2, Y3) and 2-point 200kHz pulse output (Y4, Y6)

Built-in 4 Hardware High-Speed Counters

Standard		Hardware High-Speed Counter					
1 phase 1		1 phase 1		1 phase 2		2 phase 2	
Points	Bandwidth	Points	Bandwidth	Points	Bandwidth	Points	Bandwidth
6	10kHz	2/2	200kHz/20kHz	2/2	200kHz/20kHz	1	200kHz/5kHz

* Bandwidth refers to the max. counting range of a single counter.

Outstanding Operation Performance

CPU + ASIC dual processors support floating point operations. The maximum execution speed of basic instructions can reach up to 0.24us

Flexible Function Extension Modules / Function Cards

Multiple function extension modules/function cards contain additional functions of analog I/O, temperature measurement, single-axis motion control, high-speed counting and a 3rd series communication port, etc.

PLC EASY LINK

PLC EASY LINK allows users to link maximum 32 units to the network without having to install extra communication extension modules.

Linear/Arc Interpolation Motion Control

Supports the new linear/arc interpolation motion control instructions. Together with high-speed pulse outputs, DVP-EH2 is able to perform 2-axis synchronous control.

High-Speed Special Extension Module

Used together with the new special extension modules, DVP-EH2 is able to greatly shorten the data transmission time between MPU and its extension modules as well as enhancing the execution efficiency of the program.

For more detailed specifications:
<http://www.delta.com.tw/industrialautomation> for all user's manuals of DVP-PLC

DVP-S Series MPU



DVP-SS

- Suitable for basic applications
- Compact size
- Can run with special extension modules

Specification & Performance

MPU points: 14
Max. I/O points: 238
Program capacity: 4k steps
Communication port: Built-in RS-232 and RS-485, compatible with Modbus ASCII/RTU communication protocol

High-Speed Pulse Output

Supports 2-point (Y0, Y1) independent high-speed pulse output, with frequency of up to 10kHz.

Supports PID Auto-tuning

After the operation is completed, the parameters will be saved automatically.

Built-in 4-Group High-Speed Counter

1 phase 1		1 phase 2		2 phase 2	
Points	Bandwidth	Points	Bandwidth	Points	Bandwidth
2/2	20kHz/10kHz	1	20kHz	1	4kHz

*Bandwidth refers to the max. counting range of a single counter.

DVP-SA

- Large program capacity to enhance operation performance
- Best extendability

Specification & Performance

MPU points: 12
Max. I/O points: 236
Program capacity: 8k steps
Communication port: Built-in RS-232 and RS-485, compatible with Modbus ASCII/RTU communication protocol

High-Speed Pulse Output

Supports 2-point (Y0, Y1) independent high-speed pulse output, with frequency of up to 50kHz (Y0) and 10kHz (Y1).

Maximum 8 Special Modules Extendable

For analog I/O, temperature measurement, input point DIP switch, Profibus/DeviceNet communication module, single-axis motion control.

Built-in High-Speed Counters

1 phase 1		1 phase 2		2 phase 2	
Points	Bandwidth	Points	Bandwidth	Points	Bandwidth
2/4	20kHz/10kHz	1	20kHz	1	4kHz/25kHz

*Bandwidth refers to the max. counting range of a single counter.

DVP-SX

- Built-in 2-channel analog input and 2-channel analog output
- Can run with 8 special extension modules

Specification & Performance

MPU points: 10(4DI/2DO, 2AI/2AO)
Max. I/O points: 230
Program capacity: 8k steps
Communication port: Built-in RS-232 and RS-485, compatible with Modbus ASCII/RTU communication protocol

High-Speed Pulse Output

Supports 2-point (Y0, Y1) independent high-speed pulse output, with frequency of up to 50kHz (Y0) and 10kHz (Y1).

Built-in High-Speed Counters

1 phase 1		1 phase 2		2 phase 2	
Points	Bandwidth	Points	Bandwidth	Points	Bandwidth
2/4	20kHz/10kHz	1	20kHz	1	4kHz/25kHz

*Bandwidth refers to the max. counting bandwidth of a single counter.

Built-in Analog I/O

Analog Input		Analog Output	
Points	2	Points	2
Resolution	12 bits(V)/11 bits(I)	Resolution	12 bits
Specification	-20 ~ 20mA or -10 ~ 10V	Specification	-20 ~ 20mA or -10 ~ 10V

DVP-SC

- 100kHz high-speed pulse output and 100kHz pulse counting

Specification & Performance

MPU points: 12
Max. I/O points: 236
Program capacity: 8k steps
Communication port: Built-in RS-232 and RS-485, compatible with Modbus ASCII/RTU communication protocol

High-Speed Pulse Output

Supports 2-point (Y10, Y11) independent high-speed pulse output, with frequency of up to 100kHz (Total bandwidth:130kHz).

Supports Handy Position Control Instructions

By ZRN (zero return), DRVA (absolute position), and DRVI (relative position), DVP-SC is able to complete all kinds of motion controls by working with Delta servos.

Built-in 6-Group High-Speed Counter

1 phase 1		1 phase 2		2 phase 2	
Points	Bandwidth	Points	Bandwidth	Points	Bandwidth
2/4/2	20kHz/10kHz /100kHz	1/1	20kHz/100kHz	1/1	4kHz/50kHz

*Bandwidth refers to the max. counting bandwidth of a single counter.

DVP-PM Series MPU



DVP-PM

- 2-axis linear/arc interpolation motion control
- Maximum pulse output frequency: 500kHz
- Compatible with G-Code/M-Code

Specification & Performance

MPU points: 16
Max. I/O points: 512
Program capacity: 64k steps
Communication port: Built-in RS-232 and RS-485, compatible with Modbus ASCII/RTU communication protocol
Data register: 10,000 words
*Latched

500kHz High-Speed Pulse Output

Built-in 2-group A, B phase differential signal output
X-axis pulse output: (FP0+, FP0-), (RP0+, RP0-)
Y-axis pulse output: (FP1+, FP1-), (RP1+, RP1-)

Supports MPG & Multiple External Signal Inputs

The direct input of external signals are able to complete real-time feedback and motion control.

Linear/Arc Interpolation Motion Control; Compatible with G-Code

The handy CAM software compiles CAD file into G-Code and uploads it into DVP-PM for executing complicated 2-axis linear/arc interpolation motion control in for example CNC machines.


Model	Spec
DVP20PM00D	

Motion Control MPU, as well as Extension Module

Apart from serving as an MPU for motion control operating independently, DVP-PM can further be the extension module with motion control for EH series MPU. The user has to pre-plan the motion schedule and upload it to DVP-PM (as slave) and EH series MPU only needs to give "start" and "stop" instructions. As an extension module, DVP-PM works independently and Does not affect the scan time of EH series MPU.

Compatible with the Function Extension Modules of EH Series MPU

DVP-PM offers flexible applications while being compatible with the points/function extension modules of EH series MPU.



Application


DVP-PM can be applied in SMT machine, cutting machine, packaging machine, shoe-making machine, welding machine, and machines requiring fast and accurate 2D positioning.

As MPU or Extension Module




DVP-PM can be used as a PLC MPU as well as an extension module. It is compatible with all EH2 series extension modules.

Professional Motion Controller

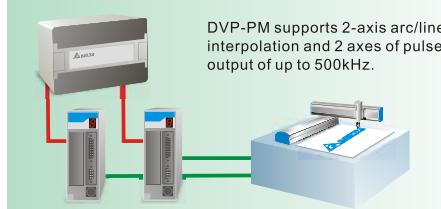

DVP-PM supports 2-axis arc/linear interpolation and 2 axes of pulse output of up to 500kHz.


Compatible with G-Code

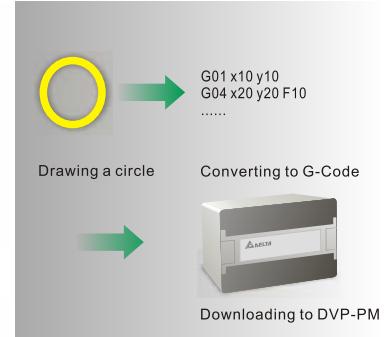

The graphic is converted into G-Code and further downloaded to DVP-PM before being drawn.

PMSoft

- Software for DVP-PM
- Importing G-Code
- Tracing trajectory
- Off-line simulation

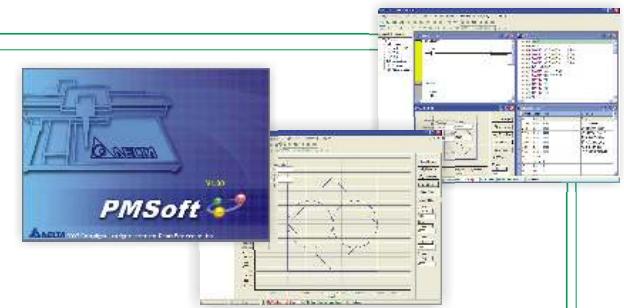

DVP-SV Series MPU



DVP-SV

- Outstanding operation performance
- High program planning capacity
- Left-side high-speed function extension interface
- Linear/arc interpolation motion control

Specification & Performance

MPU points: 28
Max. I/O points: 512
Program capacity: 16k steps
Instruction execution speed: 0.24μs (for basic instruction)
Communication port: Built-in RS-232 and RS-485, compatible with Modbus ASCII/RTU communication protocol
Data register: 10,000 words
File register: 10,000 words

High-Speed Pulse Output

Supports 2-group (Y0, Y1) (Y2, Y3) A,B phase pulse output, with frequency of up to 200kHz.
Supports 2-point (Y4, Y6) high-speed pulse output, with frequency of up to 200kHz.

Outstanding Operation Performance

CPU + ASIC dual processors support floating point operations. The maximum execution speed of basic instructions can reach 0.24s

Model	Spec
DVP28SV11R	-DC
DVP28SV11T	-DC

Left-Side High-Speed Function Extension Module

The parallel data transmission bus greatly enhances the efficiency of data exchange for real-time control. Special extension modules: analog I/O, temperature measurement, single-axis motion control, DeviceNet Master module, CANopen Master and Ethernet network module.


Linear/Arc Interpolation Motion Control

The new handy point-to-point linear motion instruction (PPMR/PPMA) and arc interpolation motion instruction (CIMR/CIMA) allow users to enter only 4 parameters to complete the control.

Built-in 4-Group Hardware High-Speed Counters

Standard		Hardware High-Speed Counter			
1 phase 1	1 phase 1	1 phase 2	2 phase 2	Points	Bandwidth
6	10kHz	2/2	200kHz/20kHz	2/2	200kHz/20kHz

*Bandwidth refers to the max. counting range of a single counter.

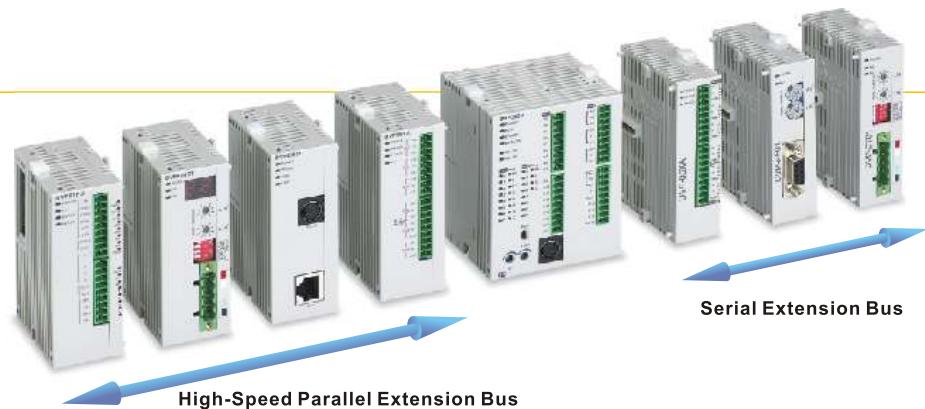

High-Speed Parallel Extension Modules

Communication

- DeviceNet Master DVPDNET-SL
- Ethernet Master DVPE01-SL
- CANopen Master DVPCOPM-SL

Analog Function Extension

- Analog Input* DVP04AD-SL
- Analog Output* DVP04DA-SL
- Mixed Analog I/O* DVP06XA-SL

Temperature Measurement

- Sensor: PT100* DVP04PT-SL
- Sensor: J, K Thermocouple DVP04TC-SL

Motion Control

- Single-Axis Position Control DVP01PU-S

Serial Extension Modules

I/O Extension

- Input Point Extension DVP08SM11N DVP16SM11N
- Output Point Extension DVP06SN11R DVP16SN11R/T

Analog Function Extension

- Analog Input DVP04AD-S DVP06AD-S
- Analog Output DVP04DA-S DVP02DA-S
- Mixed Analog I/O DVP06XA-S

Temperature Measurement

- Sensor: PT100 DVP04PT-S
- Sensor: J, K, R, S, T Thermocouple DVP04TC-S

Communication

- Profibus Slave DVPF01-S
- DeviceNet Slave DVPDT01-S

Power Supply

- DVPPS01
- DVPPS02

*Notes:

- Contact our sales for the official release date of "high-speed parallel extension modules".
- High-speed parallel extension modules are compatible with DVP32EH00R2-L and DVP32EH00T2-L.

For more detailed specifications, visit: <http://www.delta.com.tw/industrialautomation> for all user's manuals of DVP-PLC

Extension

DVP-EH2

Small PLC with the strongest operation performance!



- Maximum 512 points
- 200kHz high-speed pulse output
- New high-speed special extension modules
- Linear/arc interpolation motion control
- L type with left-side extension faunction

Function Cards

- Convert COM2 RS-485 into RS-232/422 interface



- Digital Input Point Extension




- Input Point DIP Switch



- Additional 3rd Communication Port



- Transistor Output



- Frequency Measurement Card



- Analog I/O



- Analog Input



Connection with Other Devices



- Servo



Accessories

- Data Back-up Card
DVP-256FM
(for special purpose)
- DVP PCC01
(for general purpose)

- Digital Display Panel
DVPDU01

- Data Transmission Cable
DVPACAB2A30

- Handheld Programming Panel
DVPHPP



Model Name	Specification
DVP16EH00R2	—AC— 8↑ (R→)
DVP16EH00T2	—AC— 8↑ (T→)
DVP20EH00R2	—AC— 12↑ (R→)
DVP20EH00T2	—AC— 12↑ (T→) 2-axis 200kHz (each axis) pulse output ; supports 1-group linear/arc interpolation motion control
DVP32EH00R2	—AC— 16↑ (R→)
DVP32EH00T2	—AC— 16↑ (T→) 2-axis 200kHz (each axis) pulse output ; supports 1-group linear/arc interpolation motion control
DVP32EH00M2	—AC— 40↑ (T→) 2-axis 200kHz line driver output
DVP32EH00R2-L*	—AC— 16↑ (R→)
DVP32EH00T2-L*	—AC— 16↑ (T→) 2-axis 200kHz (each axis) pulse output ; supports 1-group linear/arc interpolation motion control
DVP40EH00R2	—AC— 24↑ (R→)
DVP40EH00T2	—AC— 24↑ (T→) 4-axis 200kHz (each axis) pulse output ; supports 2-group linear/arc interpolation motion control
DVP48EH00R2	—AC— 24↑ (R→)
DVP48EH00T2	—AC— 24↑ (T→)
DVP64EH00R2	—AC— 32↑ (R→)
DVP64EH00T2	—AC— 32↑ (T→)
DVP80EH00R2	—AC— 40↑ (R→)
DVP80EH00T2	—AC— 40↑ (T→)

—AC— AC power supply C Input (points) ↑ Output (points) R→ Relay output T→ Transistor output

Serial Extension Modules

I/O Extension Modules

- Input Point Extension
DVP08HM11N
DVP16HM11N



- Output Point Extension
DVP08HN11R/T
DVP16HN11R/T
DVP32HN00R/T



- Mixed I/O Extension
DVP08HP11R/T
DVP16HP11R/T
DVP32HP00R/T
DVP48HP00R/T



Analog Function Extension

- Analog Input
DVP04AD-H2
V : 14-bit
I : 13-bit



- Analog Output
DVP04DA-H2
V : 12-bit
I : 12-bit



- Mixed Analog I/O
DVP06XA-H2
Input 4CH/Output 2CH
V : 12-bit V : 12-bit
I : 11-bit I : 12-bit



Temperature Measurement

- Sensor: PT100
DVP04PT-H2



- Sensor: J, K, R, S, T Thermocouple
DVP04TC-H2



- The left-side high-speed parallel extension modules for DVP-SV are compatible with DVP32EH00R2-L and DVP32EH00T2-L

Motion Control

- Single-Axis Position Control
DVP01PU-H2



- 1-Channel High-Speed Counter
DVP01HC-H2



*Contact our sales for the official release date of "high-speed" extension modules.

Extension



DVP-ES

256 Points
Pulse Output 10kHz



DVP-EX

256 Points
Pulse Output 10kHz
Analog Input/Output



I/O Extension Modules

- Input Point Extension
DVP08XM11N
DVP16XM11N



- Output Point Extension
DVP08XN11R/T
DVP16XN00R/T
DVP24XN11R/T
DVP24XN00R/T



- Mixed I/O Extension
DVP08XP11R/T
DVP24XP11R/T
DVP24XP00R
DVP32XP00R/T



Connection with Other Devices



Servo



VFD



Accessories

- Data Back-up Card
DVP-PCC01



- Handheld Programming Panel
DVP-HPP



- Data Transmission Cable
DVPACAB2A30(3m)



**Most cost-effective solution
to sequential control!**

Model Name	Specification
DVP14ES00R2	—AC— 6↑ R→
DVP14ES00T2	—AC— 6↑ T→
DVP24ES00R2	—AC— 16↑ R→
DVP24ES00T2	—AC— 16↑ T→
DVP24ES11R2	—DC— 16↑ R→
DVP30ES00R2	—AC— 16↑ 12↑ R→
DVP30ES00T2	—AC— 16↑ 12↑ T→
DVP32ES00R2	—AC— 16↑ 16↑ R→
DVP32ES00T2	—AC— 16↑ 16↑ T→
DVP40ES00R2	—AC— 24↑ 16↑ R→
DVP40ES00T2	—AC— 24↑ 16↑ T→
DVP60ES00R2	—AC— 36↑ 24↑ R→
DVP60ES00T2	—AC— 36↑ 24↑ T→

Model Name	Specification
DVP20EX00R2	—AC— 8DI, 4AI/6DO, 2AO R→
DVP20EX00T2	—AC— 8DI, 4AI/6DO, 2AO T→
DVP20EX11R2	—DC— 8DI, 4AI/6DO, 2AO R→

Model Name	Specification
DVP20EX00R2	—AC— 8DI, 4AI/6DO, 2AO R→
DVP20EX00T2	—AC— 8DI, 4AI/6DO, 2AO T→
DVP20EX11R2	—DC— 8DI, 4AI/6DO, 2AO R→

—AC— AC power supply C Input (points) U Output (points)
—DC— DC power supply R Relay output T Transistor output

—AC— AC power supply C Input (points) U Output (points)
—DC— DC power supply R Relay output T Transistor output

Compact Appearance; Flexible Extension!

DVP-SS

The best micro-MPU for basic applications

Model	Spec
DVP14SS11R2	—DC— 6↑ 6↑ R→
DVP14SS11T2	—DC— 6↑ 6↑ T→

R Relay output C Input (points) U Output (points)
—DC— DC power supply T Transistor output

DVP-SX

Built-in analog input/output

Model	Spec
DVP10SX11R	—DC— R→ 4DI, 2AI/2DO, 2AO
DVP10SX11T	—DC— T→ 4DI, 2AI/2DO, 2AO

—DC— DC power supply T Transistor output
R Relay output

DVP-SA

Advanced performance
8k steps program capacity

Model	Spec
DVP12SA11R	—DC— 6↑ 4↑ R→
DVP12SA11T	—DC— 6↑ 4↑ T→

R Relay output C Input (points) U Output (points)
—DC— DC power supply T Transistor output

DVP-SC



Max. 100kHz pulse output
Max. 100kHz pulse counting

Model	Spec
DVP12SC11T	—DC— 6↑ U↑ R→

—DC— DC power supply T Transistor output

I/O Extension Modules

- Input Point Extension
DVP08SM11N
- Output Point Extension
DVP06SN11R
DVP08SN11R/T
- Mixed I/O Extension
DVP08SP11R/T
DVP16SP11R/T



Analog Function Extension Modules

- Analog Input
DVP04AD-S
V: 14-bit
I: 13-bit
- Analog Output
DVP06AD-S
DVP02DA-S
V: 14-bit
I: 13-bit
- Analog Output
DVP04DA-S
DVP02DA-S
V: 12-bit
I: 12-bit
- Mixed Analog I/O
DVP06XA-S
Input 4CH / Output 2CH
V: 12-bit I: 11-bit
V: 12-bit I: 12-bit



Temperature Measurement Modules

- Sensor: PT100
DVP04PT-S
- Sensor: J, K, R, S, T
Thermocouple
DVP04TC-S
- Profibus Slave
DVPPF01-S
- DeviceNet Slave
DVPDT01-S



Motion Control Modules

- Single-Axis Position Control
DVP01PU-S



Power Supply Modules

- Power Supply Modules
DVPPS01
DVPPS02



Electrical Specifications & Dimension



Electrical Specifications

General Electrical Specifications

	AC	DC
Power Supply Voltage	100 ~ 240VAC (-15% ~ 10%), 50/60Hz ±5%	24VDC (-15% ~ 20%)
Fuse Capacity	2A/250VAC	2A/250VAC
Spike Voltage Durability	1500VAC (Primary-secondary); 1500VAC (Primary-PE); 500VAC (Secondary-PE)	
Insulation impedance	>5MΩ (all I/O point-to-ground: 500VDC)	
Noise Immunity	ESD: 8kV Air Discharge EFT: Power Line - 2kV Digital I/O 1kV Analog & Communication I/O 250V RS: 26MHz ~ 1GHz, 10V/m	
Earth	The diameter of grounding wire shall not be less than that of the wiring terminal of the power. (When many PLCs are in use at the same time, please make sure every PLC is properly grounded.)	
Operation/Storage	Storage: -25°C ~ 70°C (temperature); 5 ~ 95% (humidity) Operation: 0°C ~ 55°C (temperature); 50 ~ 95% (humidity); pollution degree 2	



Input Point Specifications

	Single Common Port Input		
	General Speed(10kHz)	Medium Speed(20kHz)	High Speed(100kHz/200kHz)
Input Signal Type	SINK / SOURCE		
Input Signal Voltage	24VDC ± 10% (5mA)		
Response time ES/EX SS/SA/SX SC EH2/SV	0 ~ 15ms adjustable 0 ~ 20ms adjustable 0 ~ 20ms adjustable 0 ~ 60ms adjustable		4.7μs 3μs
Motion Level	OFF->ON ON->OFF	>16.5VDC <8VDC	>18.5VDC <8VDC
		>16.5VDC <8VDC	>16.5VDC <8VDC

Output Point Specifications

	Relay (R)	Transistor (T)	
		General Speed	High Speed
Max. Exchange (Working) Frequency	Load ON/OFF Control	10kHz	50kHz/100kHz/200kHz
Current Specification ES/EX SS SA/SX/SC EH2 SV	2A 1.5A 1.5A 2A 1.5A	0.3A/1 point@40°C <1kHz, 0.3A/1 point@40°C ≥1kHz, 30mA/1 point@40°C	
Voltage Specification	250VAC/30VDC		30VDC
Response Time	10ms	OFF->ON: 20μs ON->OFF: 30μs	EH2/SV 0.5μs SC 1μs SA/SX 2μs


DVPACAB2A30 PIN Definition

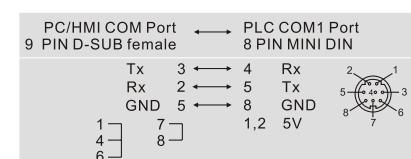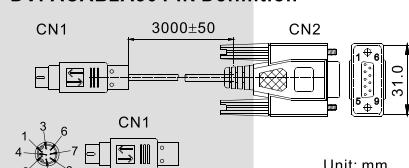

Dimension


EH2 Series MPU

Model (mm)	H	H1	W	W1	W2
DVP16EH00R2/T2	90	80	113	103	82
DVP20EH00R2/T2	90	80	113	103	82
DVP32EH00M2	90	80	143.5	133.5	82
DVP32EH00R2/T2	90	80	158.5	153.5	82
DVP32EH00R2-L	90	80	143.5	133.5	82
DVP32EH00T2-L	90	80	158.5	153.5	82
DVP40EH00R2/T2	90	80	158.5	153.5	82
DVP48EH00R2/T2	90	80	174	164	82
DVP64EH00R2/T2	90	80	212	202	82
DVP80EH00R2/T2	90	80	276	266	82




EH2 Series I/O Extension Units & Extension Modules

Model (mm)	H	H1	W	W1	W2	Model (mm)	H	H1	W	W1	W2
DVP08HM11N	90	80	40	36	82	DVP04AD-H2	90	80	60	56	82
DVP16HM11N	90	80	55	51	82	DVP04DA-H2	90	80	60	56	82
DVP08HN11R/T	90	80	40	36	82	DVP06XA-H2	90	80	60	56	82
DVP32HN00R/T	90	80	143.5	133.5	82	DVP04PT-H2	90	80	60	56	82
DVP08HP11R/T	90	80	40	36	82	DVP04TC-H2	90	80	60	56	82
DVP16HP11R/T	90	80	55	51	82	DVP01PU-H2	90	80	60	56	82
DVP32HP00R/T	90	80	143.5	133.5	82	DVP48HP00R/T	90	80	174	164	82




PM Series MPU

Model (mm)	H	H1	W	W1	W2
DVP20PM00D	90	80	174	164	82




SV Series MPU

Model (mm)	H	H1	W	W1
DVP28SV11R/T	60	90	70	55




Model (mm)	H	H1	W	W1	W2
DVP14ES00R2/T2	100	95	104	99	82
DVP24ES00(11)R2/T2	100	95	155	150	82
DVP30ES00R2/T2	100	95	155	150	82
DVP32ES00R2/T2	100	95	155	150	82
DVP16XN11R/T	100	95	155	150	82
DVP24XN11R/T	100	95	155	150	82
DVP24XN00R/T	100	95	155	150	82
DVP08XP11R/T	100	95	42	37.5	82
DVP24XP11R/T	100	95	155	150	82
DVP24XP00R	100	95	155	150	82
DVP32XP00R/T	100	95	155	150	82



SS/SA/SX/SC Series MPU

Model (mm)	H	H1	W	W1
DVP14SS11R2/T2	96	90	25.2	60
DVP12SA11R/T	96	90	37.4	60
DVP10SX11R/T	96	90	37.4	60
DVP12SC11T	96	90	37.4	60




SS/SA/SX/SC Series I/O Extension Units & Extension Modules

Model (mm)	H	H1	W	W1
DVP08SM11N	96	90	25.2	60
DVP06SN11R	96	90	25.2	60
DVP08SN11R/T	96	90	25.2	60
DVP08SP11R/T	96	95	25.2	60
DVP16SP11R/T	96	90	13.3	55
DVP06XA-S	96	90	25.2	60
DVP04PT-S	96	90	25.2	60
DVP04TC-S	96	90	25.2	60
DVP01PU-S	96	90	25.2	60
DVP01PT-S	96	90	25.2	60
DVPPS01	96	90	25.2	60
DVPPS02	96	90	25.2	60

For more detailed specifications, visit: <http://www.delta.com.tw/industrialautomation> for all user's manuals of DVP-PLC

Network Structure

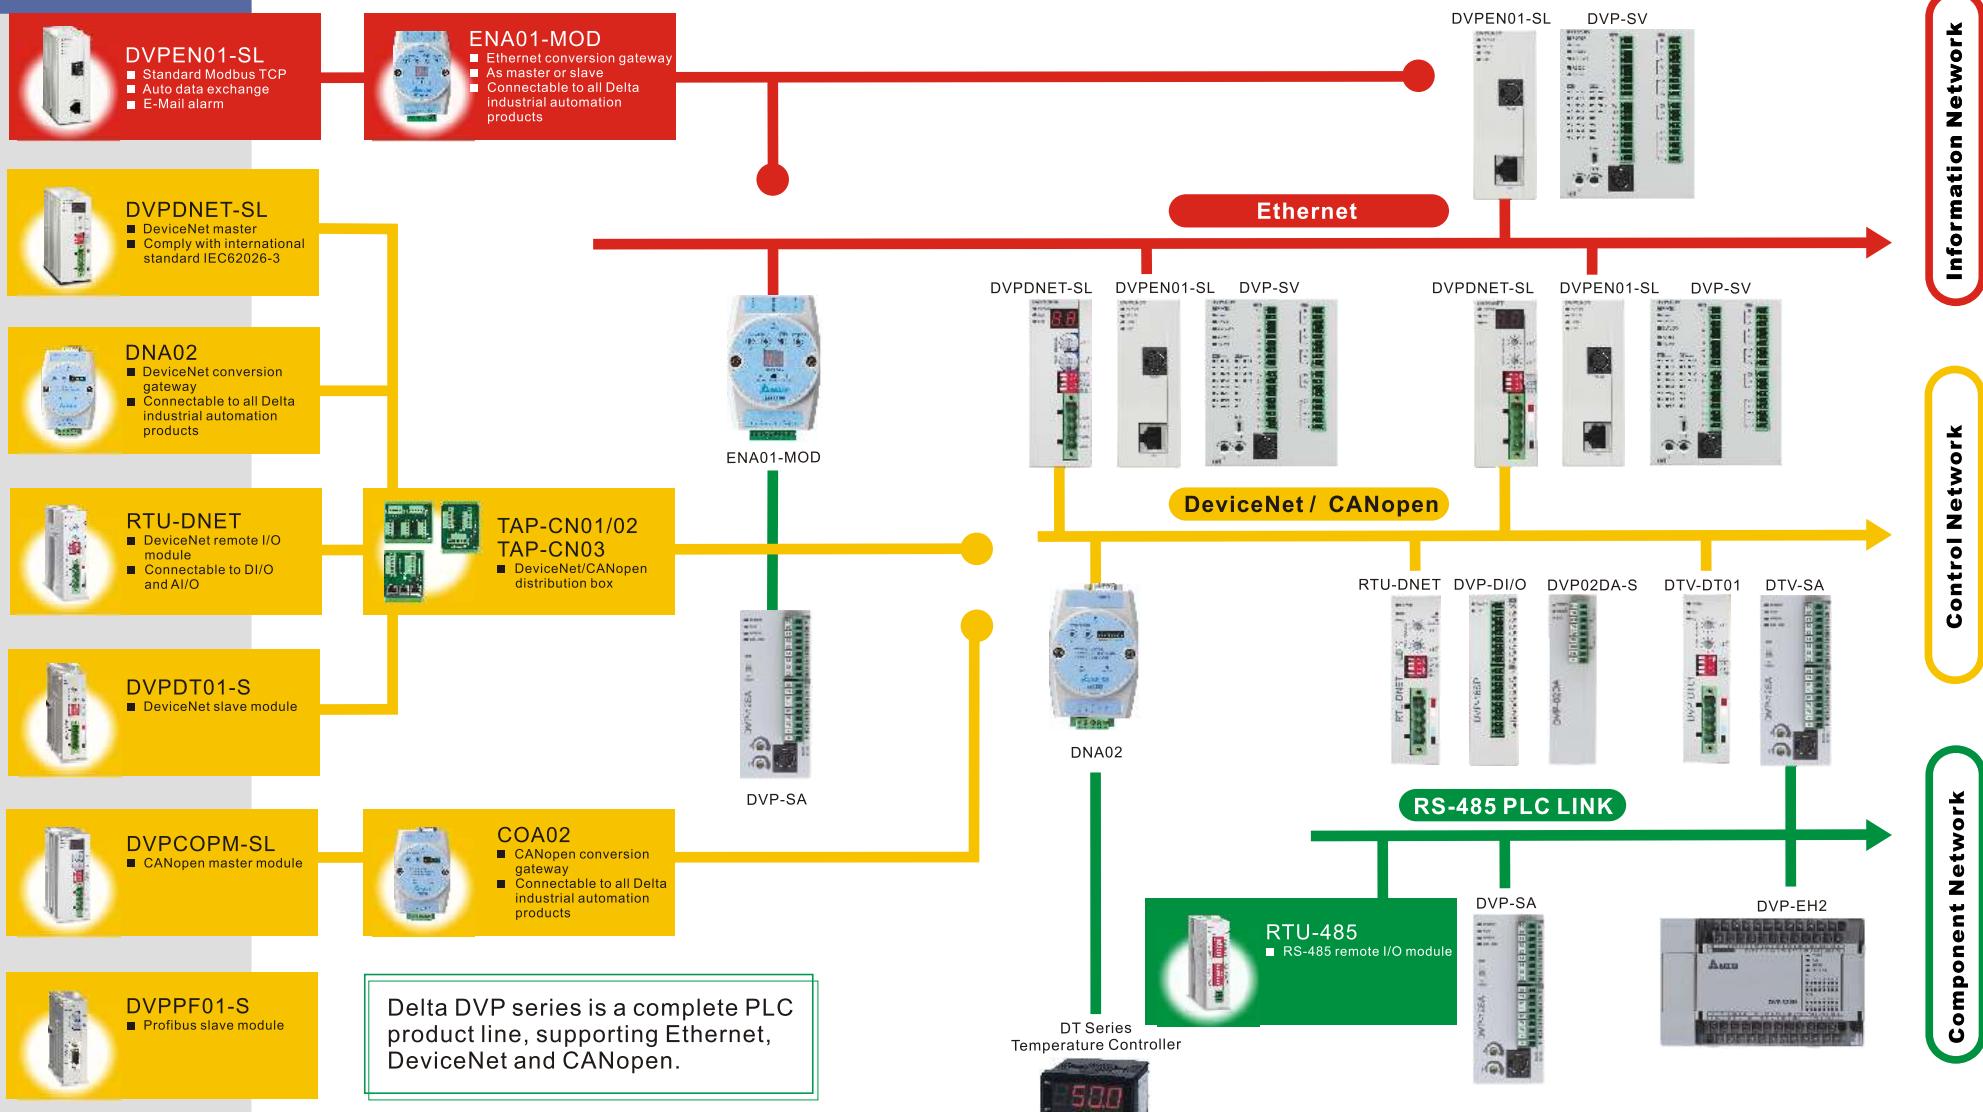

Ordering Information



● MPU	● DI/DO Extension Unit	● AI/AO Extension Module
<p>DVP </p> <p>Series ① ② ③ ④ ⑤</p> <p>1. Total I/O points 2. Model series: ES : ES MPU EX : EX MPU SS : SS MPU SA : SAMPU SX : SX MPU SC : SC MPU SV : SV MPU PM : PM MPU EH : EH MPU 3. Input power supply 00 : AC 11 : DC 4. Output type R : Relay T : Transistor N : No output 5. Version</p>	<p>DVP </p> <p>Series ① ② ③ ④ ⑤ ⑥</p> <p>1. Total I/O points 2. Applicable model: X : for ES/EX MPU S : for SS/SA/SX/SC/SV MPU H : for EH/PM MPU 3. I/O type M : Input point N : Output point P : Mixed I/O 4. Input power supply 00 : AC 11 : DC 5. Output type R : Relay T : Transistor N : No output 6. Version</p>	<p>DVP </p> <p>Series ① ② ③ ④</p> <p>1. Total I/O channels 2. Model AD : analog digital conversion DA : digital analog conversion PT : PT100 temperature module TC : Thermocouple temperature module XA : AD and DA mixed module 3. Applicable model: S : for SS/SA/SX/SC/SV MPU H : for EH/PM MPU SL : for SV(left-side extension) E : for ES MPU 4. Version</p>
● PI/PO Extension Module	● Peripherals	● Function card
<p>DVP </p> <p>Series ① ② ③</p> <p>1. Total I/O channels 2. Extension type: HC : high-speed counter PU : single-axis position module 3. Applicable model: H : for EH/PM MPU S : for SS/SA/SX/SC/SV MPU SL : for SV(left-side extension)</p>	<p>DVP </p> <p>Series ① ②</p> <p>1. Product name HPP: handheld programming panel DU: digital display panel 2. Type/function 01 : Type 01 02 : Type 02 03 : Type 03</p>	<p>DVP - F </p> <p>Series ① ② ③</p> <p>1. Function card 2. Type: 232: RS-232 card 422: RS-422 card 2OT: 2DO card, transistor output... 3. Particular definition S: Slave mode (applicable to COM3)</p>
● Accessory: Cable	● Accessory: Others	
<p>DVP A CAB </p> <p>Series ① ② ③ ④</p> <p>1. Accessory 2. CAB: cable 3. Type: 1, 2, 3, 4, 4. Length: 15: 1.5m 30: 3.0m</p>	<p>DVP A BT </p> <p>Series ① ② ③</p> <p>1. Accessory 2. BT: battery 3. Type: 01, 02,</p>	

Select your desired specifications and locate the most suitable MPU for you in the table.

Item	Spec.	Check	Locate MPU							
			ES	EX	EH2	SS	SA	SC	SX	SV
Power	AC	<input type="checkbox"/>	<input checked="" type="radio"/>	<input checked="" type="radio"/>	<input checked="" type="radio"/>					
	DC	<input type="checkbox"/>				<input checked="" type="radio"/>				
I/O Points	< 256	<input type="checkbox"/>	<input checked="" type="radio"/>	<input checked="" type="radio"/>		<input checked="" type="radio"/>	<input checked="" type="radio"/>	<input checked="" type="radio"/>	<input checked="" type="radio"/>	
	< 512	<input type="checkbox"/>			<input checked="" type="radio"/>					<input checked="" type="radio"/>
Program Capacity	< 8k	<input type="checkbox"/>	<input checked="" type="radio"/>	<input checked="" type="radio"/>		<input checked="" type="radio"/>				
	< 16k	<input type="checkbox"/>			<input checked="" type="radio"/>					<input checked="" type="radio"/>
Output Type	Transistor	<input type="checkbox"/>	<input checked="" type="radio"/>							
	Relay	<input type="checkbox"/>	<input checked="" type="radio"/>							
	Differential signal	<input type="checkbox"/>			<input checked="" type="radio"/>					
Communication	3 COM ports (RS-232/485)	<input type="checkbox"/>			<input checked="" type="radio"/>					
	Ethernet	<input type="checkbox"/>			<input checked="" type="radio"/>					<input checked="" type="radio"/>
	DeviceNet	<input type="checkbox"/>		<input checked="" type="radio"/>		<input checked="" type="radio"/> *1				
	CANopen	<input type="checkbox"/>	<input checked="" type="radio"/>							<input checked="" type="radio"/>
	Profinet	<input type="checkbox"/>		<input checked="" type="radio"/>		<input checked="" type="radio"/>				
Positioning	2-axis output	<input type="checkbox"/>	<input checked="" type="radio"/>							
	4-axis output	<input type="checkbox"/>		<input checked="" type="radio"/>						<input checked="" type="radio"/>
	2-axis interpolation	<input type="checkbox"/>			<input checked="" type="radio"/>					<input checked="" type="radio"/>
	> 4 axes	<input type="checkbox"/>	<input checked="" type="radio"/>							
	200kHz high-speed	<input type="checkbox"/>	<input checked="" type="radio"/>							
Analog Function	< 2 channels	<input type="checkbox"/>						<input checked="" type="radio"/>		<input checked="" type="radio"/>
	> 2 channels	<input type="checkbox"/>		<input checked="" type="radio"/>						
	200kHz high-speed	<input type="checkbox"/>	<input checked="" type="radio"/>		<input checked="" type="radio"/>					<input checked="" type="radio"/>
High-Speed Counting	< 2 channels	<input type="checkbox"/>	<input checked="" type="radio"/>							
	> 2 channels	<input type="checkbox"/>		<input checked="" type="radio"/>		<input checked="" type="radio"/>				<input checked="" type="radio"/>
	200kHz high-speed	<input type="checkbox"/>	<input checked="" type="radio"/>		<input checked="" type="radio"/>					<input checked="" type="radio"/>

Note:

○ : With such specification; ○ : Variable upon model; △ : With such specification while connected to extension unit

*1: S series and EH2 support only slave. SV supports master and slave.

*2: EX has 2 channels of analog input and 2 channels of analog output.

*3: Besides the built-in 4-channel high-speed counters, EH2 can be connected to high-speed counter module.



Ordering Information



EH2 Series MPU

Model	Power supply	Output method	Inputs	Outputs	Model name	Standard	
EH2 standard MPU	100~240VAC	Relay	8	8	DVP16EH00R2		
	100~240VAC	Transistor	8	8	DVP16EH00T2		
		Relay	12	8	DVP20EH00R2		
	100~240VAC	Transistor	12	8	DVP20EH00T2		
		Built in with 2 axes of independent 200kHz pulse output					
	100~240VAC	Transistor	16	16	DVP32EH00T2		
		Built in with 2 axes of independent 200kHz pulse output					
	100~240VAC	Relay	16	16	DVP32EH00R2		
	100~240VAC	Line Driver	16	16	DVP32EH00M2		
	100~240VAC	Relay	16	16	DVP32EH00R2-L		
		Transistor	16	16	DVP32EH00T2-L		
	100~240VAC	Transistor	24	16	DVP40EH00T2		
		Built in with 4 axes of independent 200kHz pulse output					
	100~240VAC	Relay	24	16	DVP40EH00R2		
	100~240VAC	Relay	24	24	DVP48EH00R2		
	100~240VAC	Transistor	24	24	DVP48EH00T2		
	100~240VAC	Relay	32	32	DVP64EH00R2		
	100~240VAC	Transistor	32	32	DVP64EH00T2		
	100~240VAC	Relay	40	40	DVP80EH00R2		
	100~240VAC	Transistor	40	40	DVP80EH00T2		
Execution time of basic instruction	0.24μs		Execution time of output instruction	0.24μs			

EH2 Series Extension Unit/Module

Model	Output method	Inputs	Outputs	Model name	Standard
Digital extension unit	Relay	-	4	DVP08HP11R	
	Relay	4	4	DVP08HP11T	
	Relay	-	8	DVP08HN11R	
	Transistor	-	8	DVP08HN11T	
	-	8	-	DVP08HM11N	
	Relay	8	8	DVP16HP11R	
	Transistor	8	8	DVP16HP11T	
	-	16	-	DVP16HM11N	
	Relay	-	32	DVP32HN00R	
	Transistor	-	32	DVP32HN00T	
	Relay	16	16	DVP32HP11R	
	Transistor	16	16	DVP32HP11T	
	Relay	24	24	DVP48HP00R	
	Transistor	24	24	DVP48HP00T	
Analog extension module	• 4 points of analog voltage(-10V~+10V)/current(-20mA~+20mA) input • Resolution: 14 bits • Photocoupler isolation • Built-in RS-485 interface			DVP04AD-H2	
	• 4 points of analog voltage(0V~+10V)/current(0mA~+20mA) output • Resolution: 12 bits • Photocoupler isolation • Built-in RS-485 interface			DVP04DA-H2	
	• 4 points of analog voltage(-10V~+10V)/current(-20mA~+20mA) input • 2 points of analog voltage(0V~+10V)/current(0mA~+20mA) output • Resolution: 12 bits • No isolation • Built-in RS-485 interface			DVP06XA-H2	

EH2 Series Extension Unit/Module

Model	Output method	Inputs	Outputs	Model name	Standard
Temperature measurement module	• 4 points of platinum temperature sensor(PT100) input • Resolution: 0.1°C • Photocoupler isolation • Built-in RS-485 interface			DVP04PT-H2	
Temperature measurement module	• 4 points of thermocouple temperature sensor(K, J type) input • Resolution: 0.1°C • Photocoupler isolation • Built-in RS-485 interface			DVP04TC-H2	
Positioning module	Single-axis 200kHz servo positioning control			DVP01PU-H2	
High-speed counter module	• 1CH high-speed counter			DVP01HC-H2	
Function card	RS-232 communication port conversion(COM2)			DVP-F232	
	RS-422 communication port conversion(COM2)			DVP-F422	
	RS-232 communication port(COM3) extension			DVP-F232S	
	RS-485 communication port(COM3) extension			DVP-F485S	
	• 2 points of analog voltage(0V~+10V)/current(0mA~+20mA) input • Resolution: 12 bits • No isolation			DVP-F2AD	
	• 2 points of analog voltage(0V~+10V)/current(0mA~+20mA) output • Resolution: 12 bits • No isolation			DVP-F2DA	
	4 points of digital input			DVP-F4IP	
	2 points of transistor output			DVP-F2OT	
	8 points of digital input DIP switch			DVP-F8ID	
	6 points of analog input rotary switch			DVP-F6VR	
Digital display panel	Frequency Measurement Card			DVP-F2FR	
	Copying PLC program, registers, and so on.			DVPDU01	

ES/EX Series MPU

Model	Power supply	Output method	Inputs	Outputs	Model name	Standard	
ES standard MPU	100~240VAC	Relay	8	6	DVP14ES00R2		
	100~240VAC	Transistor	8	6	DVP14ES00T2		
	100~240VAC	Relay	16	8	DVP24ES00R2		
	100~240VAC	Transistor	16	8	DVP24ES00T2		
	100~240VAC	Relay	18	12	DVP30ES00R2		
	100~240VAC	Transistor	18	12	DVP30ES00T2		
	100~240VAC	Relay	16	16	DVP32ES00R2		
	100~240VAC	Transistor	16	16	DVP32ES00T2		
	100~240VAC	Relay	24	16	DVP40ES00R2		
	100~240VAC	Transistor	24	24	DVP40ES00T2		
	100~240VAC	Relay	24	24	DVP40ES00R2		
	100~240VAC	Transistor	36	24	DVP60ES00T2		
	100~240VAC	Transistor	36	24	DVP60ES00R2		
	100~240VAC	Relay	8	6	DVP20EX00R2		
EX analog MPU	Relay		8	6	DVP20EX00R2		
	Analog		4	2			
	Transistor		8	6	DVP20EX00T2		
	Analog		4	2			
	Relay		8	6	DVP20EX11R2		

Execution time of basic instruction 3.8μs Execution time of output instruction 5.04μs

Ordering Information



ES/EX Series Extension Unit

Model	Output method	Inputs	Outputs	Model name	Standard
Digital extension unit	-	8	-	DVP08XM11N	 
	Relay	-	8	DVP08XN11R	
	Transistor	-	8	DVP08XN11T	
	-	16	-	DVP16XM11N	
	Relay	-	16	DVP16XN11R	
	Transistor	-	16	DVP16XN11T	
	Relay	-	24	DVP24XN11R	
	Transistor	-	24	DVP24XN11T	
	Relay	4	4	DVP08XP11R	
	Transistor	4	4	DVP08XP11T	
	Relay	16	8	DVP24XP11R	
	Transistor	16	8	DVP24XP11T	
	Transistor	16	8	DVP24XP00R	
	Relay	-	24	DVP24XN00R	
	Transistor	-	24	DVP24XN00T	
	Relay	16	16	DVP32XP00R	
	Transistor	16	16	DVP32XP00T	
	Relay	-	16	DVP32XP11R	
	Transistor	16	16	DVP32XP11T	

S Series MPU

Model	Power supply	Output method	Inputs	Outputs	Model name	Standard	
SS standard type	24VDC	Relay	8	6	DVP14SS11R2	 	
	24VDC	Transistor	8	6	DVP14SS11T2		
SA advanced type	24VDC	Relay	8	4	DVP12SA11R	 	
	24VDC	Transistor	8	4	DVP12SA11T		
SX analog type	24VDC	Relay	6	4	DVP10SX11R	 	
		Analog	2	2			
	24VDC	Transistor	6	4	DVP10SX11T		
		Analog	2	2			
SC positioning type	24VDC	Transistor	8	4	DVP12SC11T		
Execution time of basic instruction		3.8μs	Execution time of output instruction		5.04μs		
SV Extension type	24VDC	Relay	16	12	DVP28SV11R	 	
	24VDC	Transistor	16	12	DVP28SV11T		
	Built in with 4 axes of independent 200kHz pulse output						
Execution time of basic instruction		0.24μs	Execution time of output instruction		0.24μs		

S Series Extension Unit/Module

Model	Output method	Inputs	Outputs	Model name	Standard
SS/SA/SX/SC/SV digital extension unit	Relay	-	6	DVP06SN11R	 
	Relay	-	8	DVP08SN11R	
	Transistor	-	8	DVP08SN11T	
	Relay	4	4	DVP08SP11R	
	Transistor	4	4	DVP08SP11T	
	-	8	-	DVP08SM11N	
	-	8	-	DVP08SM10N	
	Digital switch	8	-	DVP08ST11N	
	Relay	8	8	DVP16SP11R	

S Series Extension Unit/Module

Model	Output method	Inputs	Outputs	Model name	Standard	
SS/SA/SX/SC/SV digital extension unit	Transistor	8	8	DVP16SP11T	 	
	Transistor (PNP)	8	8	DVP16SP11TS		
	-	16	-	DVP16SM11N		
	Transistor (pin-headed)	-	32	DVP32SN11TN		
	Pin-headed	32	-	DVP32SM11N		
SS/SA/SX/SC/SV analog extension module	<ul style="list-style-type: none"> 4 points of analog voltage (-10V~+10V)/current (-20mA~+20mA) input Resolution: 14 bits Photocoupler isolation Built-in RS-485 interface 					
	<ul style="list-style-type: none"> 4 points of analog voltage (0V~+10V)/current (0mA~+20mA) output Resolution: 12 bits Photocoupler isolation Built-in RS-485 interface 					
	<ul style="list-style-type: none"> 2 points of analog voltage (0V~+10V)/current (0mA~+20mA) output Built-in RS-485 interface 					
	<ul style="list-style-type: none"> 6 points of analog voltage (-10V~+10V)/current (-20mA~+20mA) input Resolution: 14 bits Photocoupler isolation Built-in RS-485 interface 					
	<ul style="list-style-type: none"> 2 points of analog voltage (-10V~+10V)/current (-20mA~+20mA) input 2 points of analog voltage (0V~+10V)/current (0mA~+20mA) output Resolution: 12 bits No isolation Built-in RS-485 interface 					
	<ul style="list-style-type: none"> 4 points of platinum temperature sensor (PT100) input Resolution: 0.1°C Photocoupler isolation Built-in RS-485 interface 					
	<ul style="list-style-type: none"> 4 points of thermocouple temperature sensor (K, J type) input Resolution: 0.1°C Photocoupler isolation Built-in RS-485 interface 					
	Single-axis 200kHz servo positioning control					
	24VDC DeviceNet industrial network slave module					
	24VDC Profibus/DP industrial network slave module					
SV left-side high-speed extension module	24VDC power supply module					
	100~240VAC power supply, 24VDC/1A output					
	100~240VAC power supply, 24VDC/2A output					
	Ethernet module 10/100 Base-TX					
	DeviceNet master module 500kbps					
Remote I/O monitoring module	CANopen master module 1Mbps					
	DeviceNet remote I/O module					
	RS-485 remote I/O module					
	Ethernet remote I/O module					

PM Series MPU

Model	Power supply	Output method	Inputs	Outputs	Model name	Standard
Professional motion control MPU	100~240VAC	Differential	8	8	DVP20PM00D	 

Ordering Information



Industrial Network Converter

Model	Detail	Model Name	Standard
Ethernet converter	Modbus IP converter	ENA01-MOD	
Ethernet converter	Ethernet IP converter	ENA01-EIP	
DeviceNet converter	DeviceNet/RS-232, RS-485 converter	DNA02	
CANopen converter	CANopen/RS-232, RS-485 converter	COA02	
RS-232/RS-485, 422 converter	RS-232/RS-485, 422 converter, with isolation	IFD8500	
RS-485/RS-422 repeater	RS-485/RS-422 repeater, with isolation	IFD8510	
RS-232/RS-485, 422 converter	RS-485, 422/RS-232 converter, with isolation	IFD8520	
RS-232/RS-485, 422 converter	RS-232/RS-485, 422 no-power converter, with isolation	IFD8510	
USB/RS-232, 485, 422 converter	USB/RS-232, 485, 422 converter	IFD8531	

Accessories

Model	Detail	Model name	Standard
Peripherals & accessories	DVP series handheld programming panel	DVPHP03	
	Data back-up card (one is built-in in DVPHP02)	DVP-256FM	
	Data back-up card	DVP-PCC01	
	Communication cable for DVPHP03 and PLC, 1.5m	DVPACAB115	
	Communication cable for PC (9 Pin & 25 Pin D-Sub) and PLC, 1.5m	DVPACAB215	
	Communication cable for PC (9 Pin D-Sub) and PLC, 1.5m	DVPACAB2A30	
	Communication cable (9 Pin & 25 Pin D-Sub) and PLC, 3m	DVPACAB230	
	Connection cable for DVP32SM	DVPACAB7A10	
	Connection cable for DVP32SN	DVPACAB7B10	
	Drive board for DVP32SM (32 points of output)	DVPAETB-ID32A	
	Drive board for DVP32SN (16 points of input)	DVPAETB-OR16A	
	Communication cable for DVPHP03 and PC, 1.5m	DVPACAB315	
	Supports 4 types of RS-485 connectors	ADP485-01	
	Communication cable for ADP485-01 and ASD-A, 30cm	ADPCAB03A	
	Communication cable for ADP485-01 and ASD-B, 30cm	ADPCAB03B	
	Extension cable for ES/EX series I/O extension unit, 30cm	DVPACAB403	
	Extension connector for EH series MPU and extension modules	DVPAEXT01-H	
	Extension cable for EH series MPU and extension modules, 0.9m	DVPACAB4A09	
	Extension cable for EH series MPU and extension modules, 1.8m	DVPACAB4A18	
	DeviceNet/CANopen distribution box, 1 for 2	TAP-CN01	
	DeviceNet/CANopen distribution box, 1 for 4	TAP-CN02	
	DeviceNet/CANopen distribution box, 1 for 4, RJ45 connector	TAP-CN03	
	3.6V Lithium battery (unchargeable) for EH/SA/SX series MPU	DVPABT01	

Software

Model	Detail
WPLSoft	Editing software for DVP series PLC
PMSoft	Editing software for PM series MPU
DeviceNet Builder	DeviceNet configuration software
CANopen Builder	CANopen configuration software
DMT	VB, VC DLL library for DVP series PLC

DINRAIL Power Supply

Model	Power supply	Input	Output	Model Name	Standard
CiQ series	1-phase	85~264VAC/120~375VDC	24V 60W	DRP024V060W1AZ (Plastic)	GS , CSA
		85~264VAC/120~375VDC	24V 60W	DRP024V060W1AA (Aluminum)	
		85~264VAC/120~375VDC	24V 120W	DRP024V120W1AA (Aluminum)	
		85~264VAC/120~375VDC	24V 240W	DRP024V240W1AA (Aluminum)	
		85~264VAC/120~375VDC	24V 480W	DRP024V480W1AA (Aluminum)	
3-phase	3-phase	320~575VAC/450~800VDC	24V 60W	DRP024V060W3AA (Aluminum)	
		320~575VAC/450~800VDC	24V 120W	DRP024V120W3AA (Aluminum)	
		320~575VAC/450~800VDC	24V 240W	DRP024V240W3AA (Aluminum)	
		320~575VAC/450~800VDC	24V 480W	DRP024V480W3AA (Aluminum)	

